

WOLFE 7000

TRENCH WITH POWER

The Wolfe 7000 features a wheel with a maximum trench depth of 7ft. [210cm] and up to 36" [91cm] trench width.

STATE OF THE ART TECHNOLOGY AND COMFORT

MODERN CAB DESIGN

AIR RIDE SEAT

DIGITAL CLIMATE CONTROL

GPS AND LASER READY -PLUG & PLAY INSALLATION

ERGONOMIC MACHINE CONTROLS

OPTIMAL MACHINE COOLING

The machine cooling system is designed with variable speed reversing fans. The variable speed fans help reduce fuel consumption while the auto/manual reversing feature makes for easy cleaning when operating in dusty conditions.

UNDER HOOD ACCESSIBILITY

The hoods are designed with extra clearance when open for easy maintenance access to the engine and hydraulics.

BOOM LIFT (OPTION)

The boom lift provides a convenient method of installing pipe sections into the trench.

TRENCH BOX (OPTION)

The trench box provides a protected working area behind the trenching wheel for installing pipe sections. This also allows for continuous lengths of pipe or cable products to be installed. Custom configurations available upon request.

7 DEGREE SIDE TILT (OPTION)

The side tilt feature automatically or manually keeps the wheel vertical ensuring a precise grade on sloped terrain.

CARBIDE CUTTING TEETH (OPTION)


Carbide cutting teeth are capable of cutting through frost and more abrasive soil conditions than standard teeth. Various sized wheel trenchers can be equipped with carbide teeth.

SIDE CUTTERS (OPTION)

Side cutters increase the trench width by 6" [15.2cm] without changing the bucket system.

Wolfe Heavy Equipment is a powerful agricultural and commercial trenching manufacturer committed to providing superior engineering and expert service. Wolfe trenchers are proven to hold grade in even the toughest conditions. UNEARTH THE POWER.

WOLFE

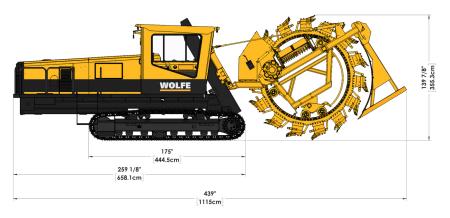

STANDARD EQUIPMENT FEATURES

CAT[™] 320 style 49 link tracks c/w **UNDER HOOD** 20" [70cm] street pads ACCESSIBILITY Two-Speed Drive System 1st Max. 120 ft/min [2.2km/h] 440HP CAT[™] 2nd Max. 260 ft/min [4.75km/h] **C-15 ENGINE** Proportional Hydraulics / load-sensing pumps Dual or Single Stick Track Control System **AIR RIDE SEAT** State-of-the-art Plus+1® Electronic Over Hydraulic Control System **GPS AND** Side Mounted Cabs (Left or Right hand) LASER READY A/C and Heated Cabs C/W digital climate control **ERGONOMIC** GPS and Laser ready MACHINE Engine Cooling System with auto/manual reversing fans **CONTROLS** Built-in Air Compressor **Engine Block Heater HEAVY DUTY** Auto Idle **COMPONENTS** 1.25" [3.17cm] thick wheel rims Heavy duty bolt-on wheel segments Heavy duty heat treated buckets Heavy duty drop forged teeth Dual lower truck roller Rear upper truck roller

117 5/8" 288.9cm 136 7/8" 347.6cm

OPTIONAL EQUIPMENT ADD-ONS

7° TILT FRAME C/W AUTO SENSING

BOOM LIFT

TRENCH BOX

AUTO/MANUAL LUBE MANIFOLD

CUSTOM COLOURS AVAILABLE

WOLFE HEAVY DUTY 57 LINK TRACKS C/W 31.5" [80CM] SINGLE GROUSER PADS

CARBIDE CUTTING TEETH

SIDE CUTTERS

HYDRAULIC OIL PRE-HEATER

CABLE TOW SYSTEM

CAMERAS AND VIEW MONITORS

EXTERIOR LIGHT PACKAGE

AUTO STEER READY

XD PACKAGE UPGRADE

1.5" [3.8CM] THICK WHEEL RIMS AND BUCKETS. WIDER DRIVE SPROCKETS AND WHEEL SEGMENTS. EXTREME DUTY LOWER ROLLERS & UPPER TRUCKS. 30" [76.2CM] - 36" [91.5CM] TRENCH WIDTH.

Upper carrier truck roller (head shaft support)

Machine Weight Range: 52,500lbs - 70,000lbs

[23,814kg - 32,000kg]

HEAVY DUTY UPRIGHTS AND SLIDERS, MAST CYLINDER, AND PIVOT ASSEMBLIES.

WITH THE SPECIAL TOOTH HOLDERS, IT CAN BE EQUIPPED WITH FLAT DIGGING OR CARBIDE BULLET TEETH.



